


CST


container stairs

Our stairs for containers are versatile, suitable for various types of construction containers, whether utilized for social areas, offices, warehouses, or shipping containers. Their lightweight and modular design ensures quick and easy installation.


Our stairs are designed in accordance with EN ISO 14122-3 and EN 12811-1.

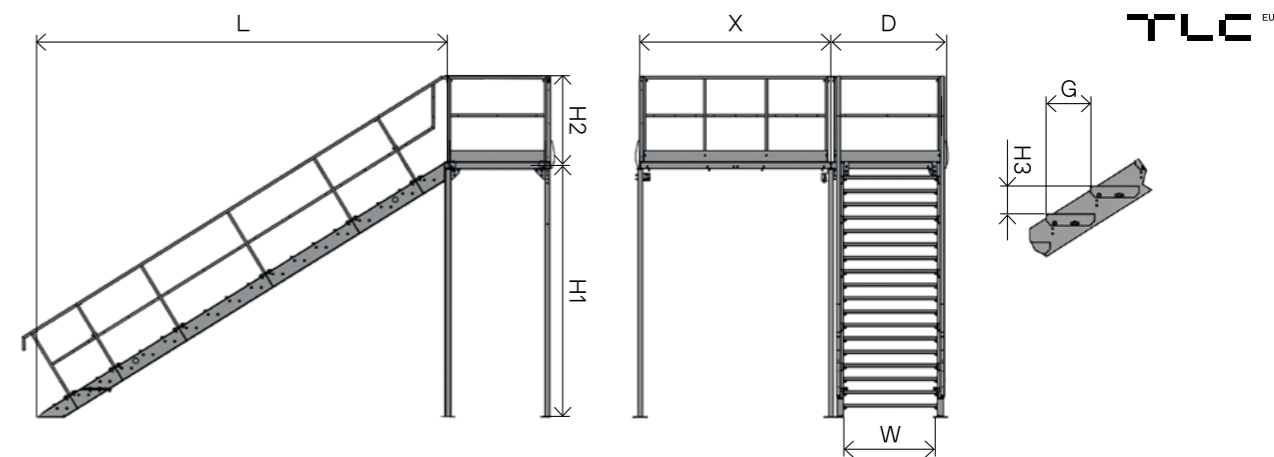

	Container height [mm]	L [mm]	H [mm]	W [mm]	D [mm]	H2 [mm]	X [mm]	G [mm]	H3 [mm]	Number of steps
Steel stairs 2 kN	2960	4594	3060	1000 or 1250	1100 or 1250	1100	2440 or 3000	270	179	17
	2800	4324	2888							16
	2590	4037	2702							15
Steel stairs 5 kN	3100	5095	3265	1200	1440	1100	2440	280,4	171,8	19
	2960	4974	3060							18
	2800	4712	2900							17
Aluminum stairs 2 kN	2960	4488	3055	1000 or 1200	1100 or 1300	1100	2440 or 3000	263	179,5	17
	2800	4245	2889							16
	2590	3953	2690							15



stairs adapted to container heights: 2960, 2800, 2590 mm



available widths: 1000, 1200 mm



compliance with standards PN-EN ISO 14122-3, PN-EN 12811




many configurations of steel and aluminum stairs




2kN, 5kN (steel stairs)
2kN (aluminum stairs)



check out the full range of our container stairs



Variant 1

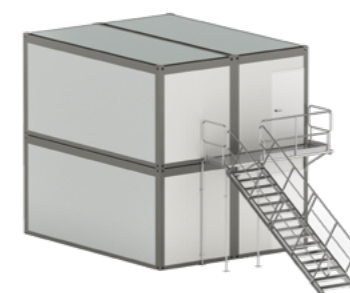

Variant 2



Variant 3



Variants 4, 4A, 6



Variant 5



Variant 5A



Variant 5B




Variant 7



Variant 8



Variant 9



Variant 10



Variant 12



Variant 13